

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
AIA #:	SIS #:
CSI Section 11400	

Narrow Back Bars

Underbar Equipment
X-line

Model : XBB-24-48SB-N6
XBB-24-48SG-N6



XBB-24-48SG-N6



XBB-24-48SB-N6

FEATURES & BENEFITS

■ Equipped with easy-to-clean Air Filter

The accumulation of dust in the condenser causes failures or breakdowns in refrigeration. Refrigeration operate normally until they accumulate a certain amount of dust. When they reach their limit, performance will drop rapidly, resulting in damages and possible disposal of stored goods. This is why all refrigeration manufacturers require the condenser to be cleaned at least once a month for warranty to remain valid. With RefrigerationX, this process is simple and easy due to the frontal access air filter device. Pull out the filter and vacuum lightly to remove the dust. Place it back into position when complete.

■ Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, RefrigerationX brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

■ Forced air cooling system

Fast cooling and balanced temperature throughout the cabinet.

■ LED interior lighting

■ Stainless steel countertop and interior

The exterior and interior of the cabinet are constructed with heavy gauge reinforced stainless steel. RefrigerationX Back Bar model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

■ Double pane glass doors with Low-E glass (SG Models)

■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

■ Adjustable, heavy duty, PE (polyethylene) coated wire shelves

■ Side mount compressor unit

With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front air intake feature also allows this model to be highly efficient in narrow spaces.

■ Refrigerator holds 33°F ~ 38°F for the best in beverage preservation




Model	Swing Doors	CU./FT.	1/2 Barrels	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
XBB-24-48SB-N6	2	12.2	-	4	1/5	2.0	238	49 1/8 x 24 1/2 x 35 3/8
XBB-24-48SG-N6	2	12.2	-	4	1/3	2.7	238	49 1/8 x 24 1/2 x 35 3/8

Narrow Back Bars

Underbar Equipment
X-line

Model : XBB-24-48SB-N6, XBB-24-48SG-N6

ELECTRICAL DATA		
Voltage		115/60/1
Plug Type		 NEMA 5-15P
Full Load Amperes		2.0 (SB) / 2.7 (SG)
Compressor HP		1/5 (SB) / 1/3 (SG)
Refrigerant		R-600a
Cord Length (ft.)		8.5
Lamp (W)		2 (SB) / 7.5 (SG)
DIMENSIONAL DATA		
Capacity	cu. ft.	12.2
	1/2 Barrels	-
	12 oz Cans - 6 pack	60
	12 oz Bottles - 6 pack	45
Ext. Length Overall (in.)		49 1/8 (1248mm)
Ext. Depth Overall (in.)*		24 1/2 (623mm)
Ext. Height Overall (in.)†		35 3/8 (900mm)
# of Swing Doors		2
# of Shelves		4
Shelf Size (L x D) (in.)		16 3/4 x 18
# of Casters		
Net Weight (lbs.)		214
Gross Weight (lbs.)		238

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 3/8" (SB) / 1-1/2" (SG) for door handles.

Depth does not include 1-1/4" for rear spacers.

† Height does not include 3-1/8" for caster height.

- **WARRANTY :** 2 Year Parts and Labor Warranty
5 Year Compressor Warranty

STANDARD FEATURES

- Anti-corrosion coated evaporator
- Self-contained system
- 2.5" dia. swivel casters with locks on the front set


OPTIONAL ACCESSORIES

- 1" caster, 1/2" diameter & 13 TPI: S28R813660 (non-brake)
- 2" caster for underbar series, 1/2" diameter: P0165B0100 (non-brake), P0165B0110 (w/ brake)
- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 4" caster, 1/2" diameter & 13 TPI: 30265L0400 (non-brake), 30265L0300 (w/ brake)
- Leveling leg, 1/2" - 13 TPI x 1.54": LFM1213566
- 6" adjustable stainless steel leg: P0121P0100
- Additional PE coated wire shelf: P0178S0400


Ver.20250819

PLAN VIEW


(unit : inch)

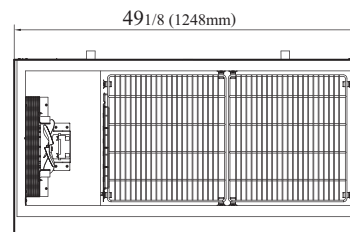


TOP VIEW

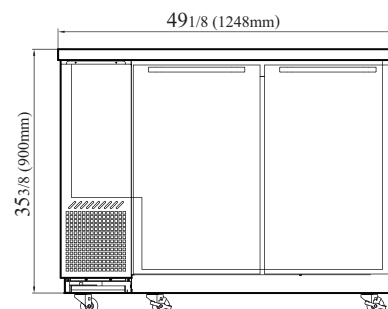


XBB-24-48SB-N6 FRONT VIEW

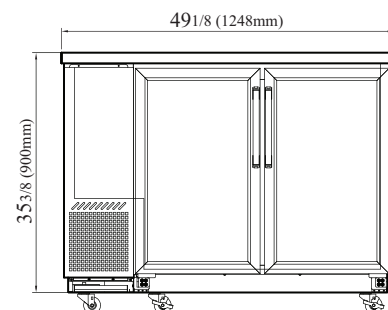

XBB-24-48SG-N6 FRONT VIEW



XBB-24-48SB-N6



XBB-24-48SG-N6

SIDE VIEW



Warranty: 800-381-7770

Warranty@RefrigerationX.com