

Refrigeration

We Build Trust, Sell Satisfaction

4184 E. Conant St., Long Beach, CA 90808

www.RefrigerationX.com



Project:

Model #:

Item #:

Available W/H:

Qty:

Approval:

AIA #:

SIS #:

CSI Section 11400

Narrow Back Bars

Underbar Equipment
X-line

Model : XBB-24-72SB-N6
XBB-24-72SG-N6



XBB-24-72SG-N6



XBB-24-72SB-N6

Easy to Clean Air Filter
Front Access



FEATURES & BENEFITS

■ Equipped with easy-to-clean Air Filter

The accumulation of dust in the condenser causes failures or breakdowns in refrigeration. Refrigeration operate normally until they accumulate a certain amount of dust. When they reach their limit, performance will drop rapidly, resulting in damages and possible disposal of stored goods. This is why all refrigeration manufacturers require the condenser to be cleaned at least once a month for warranty to remain valid. With RefrigerationX, this process is simple and easy due to the frontal access air filter device. Pull out the filter and vacuum lightly to remove the dust. Place it back into position when complete.

■ Hydrocarbon refrigerants (R-290 / R-600a)

With innovative and eco-friendly technology, RefrigerationX brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

■ Forced air cooling system

Fast cooling and balanced temperature throughout the cabinet.

■ LED interior lighting

■ Stainless steel countertop and interior

The exterior of the cabinet is constructed with heavy gauge reinforced stainless steel countertop and wear-resistant black vinyl coated galvanized steel. The interior is painted galvanized steel with reinforced stainless steel floor. RefrigerationX Back Bar model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

■ Double pane glass doors with Low-E glass (SG Models)

■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

■ Adjustable, heavy duty, PE (polyethylene) coated wire shelves

■ Side mount compressor unit

With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front air intake feature also allows this model to be highly efficient in narrow spaces.

■ Refrigerator holds 33°F ~ 38°F for the best in beverage preservation

NATURAL
Refrigerant

ISO 9001:2008

Intertek

Intertek

2 YEAR
WARRANTY

Compressor
5 YEAR
WARRANTY

Model	Swing Doors	CU./FT.	1/2 Barrels	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
XBB-24-72SB-N6	3	20.62	3	6	1/5	3.0	397	73 1/8 x 24 1/2 x 35 3/8
XBB-24-72SG-N6	3	20.62	3	6	1/3	3.1	397	73 1/8 x 24 1/2 x 35 3/8

Narrow Back Bars

Underbar Equipment
X-line

Model : XBB-24-72SB-N6, XBB-24-72SG-N6

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	 NEMA 5-15P
Full Load Amperes	3.0 (SB) / 3.1 (SG)
Compressor HP	1/5 (SB) / 1/3 (SG)
Refrigerant	R-600a
Cord Length (ft.)	8.5
Lamp (W)	4 (SB) / 9 (SG)
DIMENSIONAL DATA	
Capacity	cu. ft. 20.62
	1/2 Barrels 3
	12 oz Cans - 6 pack 105
	12 oz Bottles - 6 pack 90
Ext. Length Overall (in.)	73 1/8 (1858mm)
Ext. Depth Overall (in.)*	24 1/2 (623mm)
Ext. Height Overall (in.)†	35 3/8 (900mm)
# of Swing Doors	3
# of Shelves	6
Shelf Size (L x D) (in.)	20 1/2 x 18 (L) 18 1/2 x 18 (M/R)
# of Casters	 6EA
Net Weight (lbs.)	357
Gross Weight (lbs.)	397

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 3/8" (SB) / 1-1/2" (SG) for door handles.

Depth does not include 1-1/4" for rear spacers.

† Height does not include 3-1/8" for caster height.

- **WARRANTY : 2 Year Parts and Labor Warranty**
5 Year Compressor Warranty

STANDARD FEATURES


- **Anti-corrosion coated evaporator**
- **Self-contained system**
- **2.5" dia. swivel casters with locks on the front set**

OPTIONAL ACCESSORIES


- 1" caster, 1/2" diameter & 13 TPI: S28R813660 (non-brake)
- 2" caster for underbar series, 1/2" diameter: P0165B0100 (non-brake), P0165B0110 (w/ brake)
- 4" caster, 1/2" diameter & 13 TPI: 30265L0400 (non-brake), 30265L0300 (w/ brake)
- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- Leveling leg, 1/2" - 13 TPI x 1.54": LFM1213566
- 6" adjustable stainless steel leg: P0121P0100
- Additional PE coated wire shelf: P0178S0430 (L), P0178S0420 (M/R)

PLAN VIEW


(unit : inch)

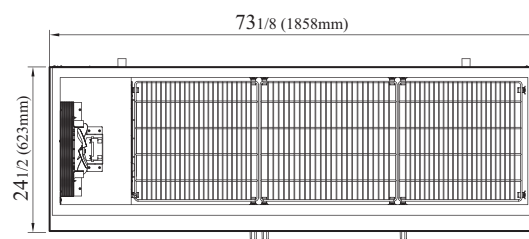


TOP VIEW

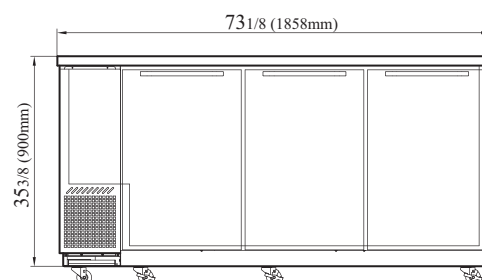

XBB-24-72SB-N6 FRONT VIEW

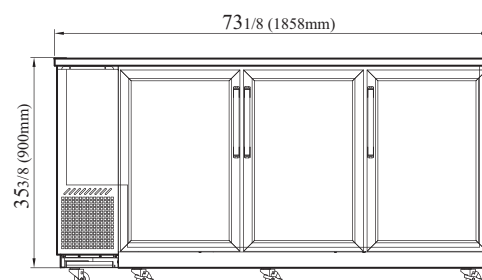

XBB-24-72SG-N6 FRONT VIEW

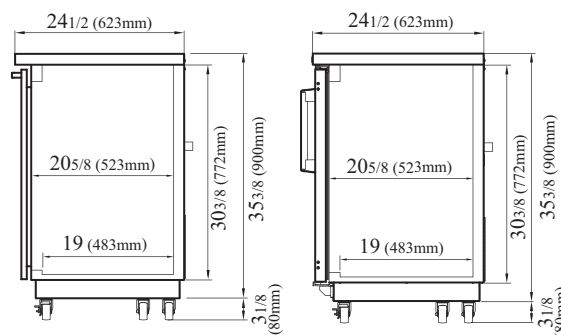

XBB-24-72SB-N6

XBB-24-72SG-N6

SIDE VIEW

Ver.20250819

NATURAL
Refrigerant

SPEC
ISO 9001:2008

ETL
Intertek

ETL
Intertek

2 YEAR
WARRANTY

Compressor
5 YEAR
WARRANTY
(10.5 A amp)

Warranty: 800-381-7770

Warranty@RefrigerationX.com

Continued product development may necessitate specification changes without notice.