

Refrigeration

We Build Trust, Sell Satisfaction

4184 E. Conant St., Long Beach, CA 90808

www.RefrigerationX.com



Project:

Model #:

Item #:

Available W/H:

Qty:

Approval:

AIA #:

SIS #:

CSI Section 11400

Back Bars

Underbar Equipment
X-line

**Model : XBB-2SB-N6
XBB-2SG-N6**



XBB-2SB-N6



XBB-2SG-N6

FEATURES & BENEFITS

■ Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, RefrigerationX brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

■ Stainless steel countertop and interior

The exterior of the cabinet is constructed with heavy gauge reinforced stainless steel countertop and wear-resistant black vinyl coated galvanized steel. The interior is painted galvanized steel with reinforced stainless steel floor. RefrigerationX Back Bar model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

■ Forced air cooling system

Fast cooling and balanced temperature throughout the cabinet.

■ LED interior lighting

■ Double pane glass doors with Low-E glass (SG Models)

■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

■ Adjustable, heavy duty, PE (polyethylene) coated wire shelves

■ Side mount compressor unit



With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front air intake feature also allows this model to be highly efficient in narrow spaces.

■ Refrigerator holds 33°F ~ 38°F for the best in beverage preservation



Model	Swing Doors	CU./FT.	1/2 Barrels	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
XBB-2SB-N6	2	18.99	2	6	1/7	3.2	298	58 7/8 x 27 1/4 x 37 1/8
XBB-2SG-N6	2	18.99	2	6	1/5	2.7	331	58 7/8 x 27 1/4 x 37 1/8

Model : XBB-2SB-N6, XBB-2SG-N6

ELECTRICAL DATA		
Voltage		115/60/1
Plug Type		 NEMA 5-15P
Full Load Amperes		3.2 (SB) / 2.7 (SG)
Compressor HP		1/7 (SB) / 1/5 (SG)
Refrigerant		R-600a
Cord Length (ft.)		8.5
Lamp (W)		12.5
DIMENSIONAL DATA		
Capacity	cu. ft.	18.99
	1/2 Barrels	2
	12 oz Cans - 6 pack	85
	12 oz Bottles - 6 pack	70
Ext. Length Overall (in.)		58 7/8 (1494mm)
Ext. Depth Overall (in.)*		27 1/4 (692mm)
Ext. Height Overall (in.)†		37 1/8 (942mm)
# of Swing Doors		2
# of Shelves (# of Sub Shelves)		4 (2)
Shelf Size (L x D) (in.)		(L) 24 3/8 x 19 3/8, (R) 20 x 19 3/8
# of Casters		
Net Weight (lbs.)		276 (SB) / 309 (SG)
Gross Weight (lbs.)		298 (SB) / 331 (SG)

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 3/8" (SB) / 1-1/2" (SG) for door handles.

Depth does not include 1-1/4" for rear spacers.

† Height does not include 3-1/8" for caster height.

- **WARRANTY :** 2 Year Parts and Labor Warranty
5 Year Compressor Warranty

■ STANDARD FEATURES


- Anti-corrosion coated evaporator
- Self-contained system
- 2.5" dia. swivel casters with locks on the front set

■ OPTIONAL ACCESSORIES


- 1" caster, 1/2" diameter & 13 TPI: S28R813660 (non-brake)
- 2" caster for underbar series, 1/2" diameter: P0165B0100 (non-brake), P0165B0110 (w/ brake)
- 4" caster, 1/2" diameter & 13 TPI: 30265L0400 (non-brake), 30265L0300 (w/ brake)
- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- Leveling leg, 1/2" - 13 TPI x 1.54": LFM1213566
- 6" adjustable stainless steel leg: P0121P0100
- Additional PE coated wire shelf: 30278D1000 (Left), 30278D0900 (Right)

PLAN VIEW


(unit : inch)

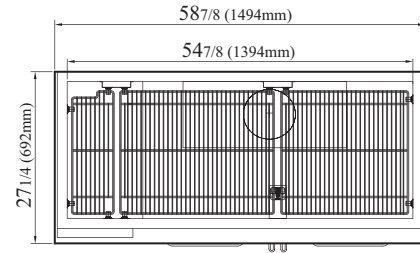


TOP VIEW

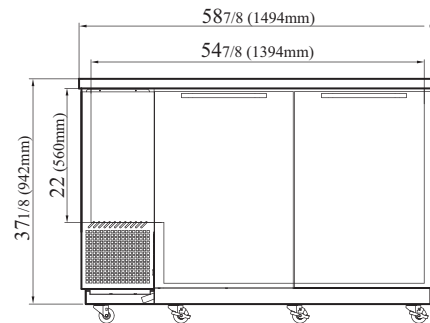


XBB-2SB-N6 FRONT VIEW

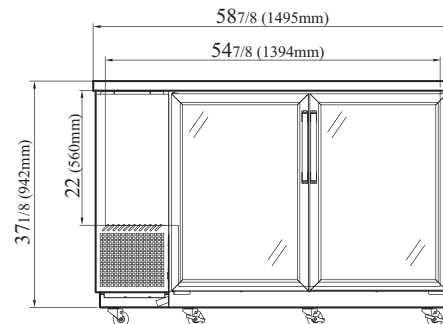

XBB-2SG-N6 FRONT VIEW



XBB-2SB-N6



XBB-2SG-N6

SIDE VIEW

Ver.20250523



Warranty: 800-381-7770

Warranty@RefrigerationX.com