

# Refrigeration

We Build Trust, Sell Satisfaction

4184 E. Conant St., Long Beach, CA 90808

[www.RefrigerationX.com](http://www.RefrigerationX.com)



Project:

Model #:

Item #:

Available W/H:

Qty:

Approval:

AIA #:

SIS #:

CSI Section 11400

## Bottle Coolers

Underbar Equipment  
X-line

**Model : XBC-36SB-N6**



### FEATURES & BENEFITS

#### Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, RefrigerationX brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

#### Forced air cooling system

Positive guided forced air cooling system chills bottles on top first.

#### High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

#### Adjustable, heavy duty, PE (polyethylene) coated dividers

#### Side mount compressor unit

With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front air intake feature also allows this model to be highly efficient in narrow spaces.

#### Stainless steel cabinet construction

SB models have an attractive wear-resistant black vinyl exterior. Heavy gauge stainless steel countertop and glide lids are perfect for sanitation and durability. The interior is stainless steel except galvanized steel top. RefrigerationX Bottle Cooler model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

#### Rugged built-in removable bottle cap opener and cap catcher

#### Large capacity cooler cabinet requires only minimum floor space

#### Refrigerator holds 33°F ~ 38°F for the best in beverage preservation



| Model              | Sliding Doors | CU./FT.    | Capacity<br>(12oz.btls. - 6 pack) | # of Dividers | HP         | AMPS       | Crated Weight (lbs.) | L x D* x H†<br>(inches)      |
|--------------------|---------------|------------|-----------------------------------|---------------|------------|------------|----------------------|------------------------------|
| <b>XBC-36SB-N6</b> | <b>1</b>      | <b>8.5</b> | <b>12</b>                         | <b>2</b>      | <b>1/8</b> | <b>1.9</b> | <b>221</b>           | <b>363/4 x 261/2 x 331/4</b> |

## Model : XBC-36SB-N6

| ELECTRICAL DATA            |                        |                                                                                              |
|----------------------------|------------------------|----------------------------------------------------------------------------------------------|
| Voltage                    |                        | 115/60/1                                                                                     |
| Plug Type                  |                        |  NEMA 5-15P |
| Full Load Amperes          |                        | 1.9                                                                                          |
| Compressor HP              |                        | 1/8                                                                                          |
| Refrigerant                |                        | R-600a                                                                                       |
| Cord Length (ft.)          |                        | 8.5                                                                                          |
| DIMENSIONAL DATA           |                        |                                                                                              |
| Capacity                   | 12 oz Bottles - 6 pack | 12                                                                                           |
| Net Capacity (cu. ft.)     |                        | 8.5                                                                                          |
| Ext. Length Overall (in.)  |                        | 36 3/4 (934mm)                                                                               |
| Ext. Depth Overall (in.)*  |                        | 26 1/2 (673mm)                                                                               |
| Ext. Height Overall (in.)† |                        | 33 1/4 (844mm)                                                                               |
| # of Dividers              |                        | 2                                                                                            |
| # of Casters               |                        |  5EA        |
| Net Weight (lbs.)          |                        | 190                                                                                          |
| Gross Weight (lbs.)        |                        | 221                                                                                          |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 1-7/8" for cap catcher and 1-1/4" for rear spacers.

† Height does not include 3-1/8" for caster height.

### ■ WARRANTY : 2 Year Parts and Labor Warranty 5 Year Compressor Warranty

### ■ STANDARD FEATURES

- Anti-corrosion coated evaporator
- Self-contained system
- 2.5" dia. swivel casters with locks on the front set


### ■ OPTIONAL ACCESSORIES

- 1" caster, 1/2" diameter & 13 TPI: S28R813660 (non-brake)
- 2" caster for underbar series, 1/2" diameter: P0165B0100 (non-brake), P0165B0110 (w/ brake)
- 4" caster, 1/2" diameter & 13 TPI: 30265L0400 (non-brake), 30265L0300 (w/ brake)
- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- Leveling leg, 1/2" - 13 TPI x 1.54": LFM1213566
- 6" adjustable stainless steel leg: P0121P0100


Ver.20250819

## PLAN VIEW


(unit : inch)

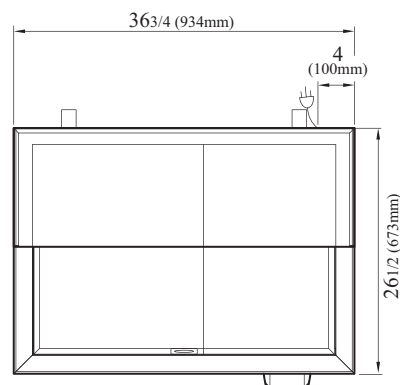

TOP VIEW

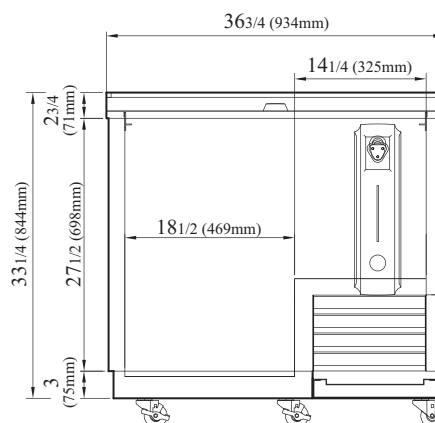

FRONT VIEW

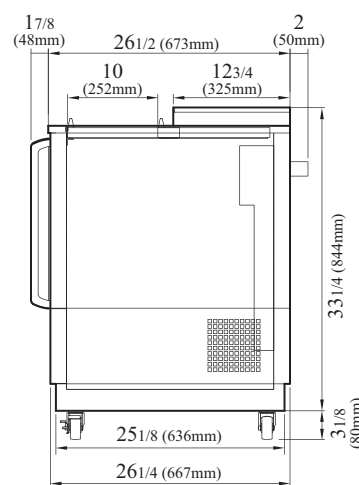

SIDE VIEW



Warranty: 800-381-7770

Warranty@RefrigerationX.com