

## Beer Dispenser

Underbar Equipment  
X-line

**Model : XBD-1SB-N6**



- Does not include keg couplers

### FEATURES & BENEFITS

#### ■ Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, RefrigerationX brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

#### ■ Forced air cooling system

Fast cooling and balanced temperature throughout the cabinet.

#### ■ Stainless steel cabinet construction

SB models have an attractive wear-resistant black vinyl exterior. Heavy gauge stainless steel countertop is perfect for sanitation and durability. The interior is stainless steel except galvanized steel top. Spacious inside construction with 31 1/4" inner height accommodates various sizes of beer kegs. Refrigeration X beer dispenser model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

#### ■ High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

#### ■ Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

#### ■ 3" diameter stainless steel insulated beer towers



#### ■ Comes standard with a two-way tapper manifold

#### ■ Beer dispenser holds 33°F ~ 38°F for the best in beverage preservation



Model	Swing Door	1/2 Barrels	HP	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
<b>XBD-1SB-N6</b>	<b>1</b>	<b>1</b>	<b>1/10</b>	<b>1.6</b>	<b>185</b>	<b>23 5/8 x 29 3/4 x 34 1/2</b>

## Model : XBD-1SB-N6

ELECTRICAL DATA		
Voltage		115/60/1
Plug Type		 NEMA 5-15P
Full Load Amperes		1.6
Compressor HP		1/10
Refrigerant		R-600a
Cord Length (ft.)		8.5
DIMENSIONAL DATA		
Net Capacity	1/2 Barrels	1
	cu. ft.	7.76
Ext. Length Overall (in.)		23 5/8 (600mm)
Ext. Depth Overall (in.)*		29 3/4 (756mm)
Ext. Height Overall (in.)†		34 1/2 (875mm)
# of Swing Door		1
# of Casters		 4EA
Net Weight (lbs.)		175
Gross Weight (lbs.)		185

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 3/8" for door handle.

† Height does not include 4-7/8" for caster height. Height does not include 16" for draft arm.

- **WARRANTY :** 2 Year Parts and Labor Warranty  
5 Year Compressor Warranty

### ■ STANDARD FEATURES


- Anti-corrosion coated evaporator
- Double faucet beer tower
- Self-contained system
- 4" dia. swivel casters with locks on the front set

### ■ OPTIONAL ACCESSORIES


- Triple faucet draft tower: 153A-3
- \* Additional purchase of distributor (2 Way) required: P0100D2400

## PLAN VIEW


(unit: inch)



TOP VIEW

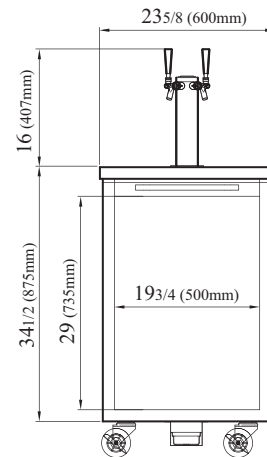

FRONT VIEW

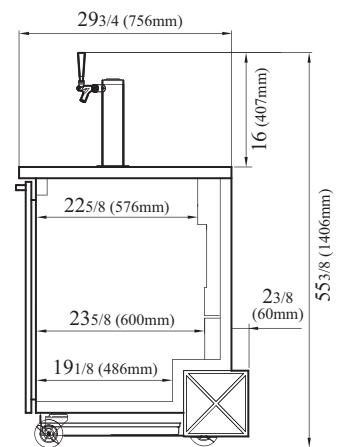

SIDE VIEW

Ver.20250523



Warranty: 800-381-7770

Warranty@RefrigerationX.com