

Refrigeration

We Build Trust, Sell Satisfaction

4184 E. Conant St., Long Beach, CA 90808

www.RefrigerationX.com



Project:

Model #:

Item #:

Available W/H:

Qty:

Approval:

AIA #:

SIS #:

CSI Section 11400

Pizza Prep Table

Food Prep Tables - Pizza Prep
X-line

Model : XPR-67-N



FEATURES & BENEFITS

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, RefrigerationX brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Cold Bunker system

Our innovative forced air system allows cold air to flow all around the food pan area, covering not only underneath the pan, but also the front, top and the rear. This unique air flow creates a cold air-shield around the pan, which maintains the food temperature at under 41°F (NSF requirement) even when the lids are opened. In addition, the compartment isolates pans from the reach-in area to prevent food spillage.

Cabinet construction

X-line model boasts a stainless steel exterior (door) with AL exterior sides (galvanized steel top, bottom, and back). Interior has a stainless steel bottom with AL interior (walls, door liners, and top duct).

Insulated pan cover

Adjustable, heavy duty, PE (polyethylene) coated wire shelves

Extra deep HDPE cutting board

Our cutting board is 19-1/4" deep and 1/2" thick to provide ample working space, and is made of easy to use and sanitize HDPE (High Density Polyethylene). The new side rail cutting board bracket makes it easy to secure and remove the cutting board.

Side mount compressor unit

Compressors positioned on the side of the units make serving our units easy. Our front air intake feature also allows this model to be highly efficient in narrow spaces.

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

Refrigerator holds 33°F ~ 41°F for the best in food preservation




Model	Swing Doors	CU./FT.	#of Shelves	#of Pans	HP	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
XPR-67-N	2	20	4	9	3/8	4.2	411	67 1/8 x 32 1/4 x 36 1/2

Pizza Prep Table

Food Prep Tables - Pizza Prep
X-line

Model : XPR-67-N

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	 NEMA 5-15P
Full Load Amperes	4.2
Compressor HP	3/8
Cord Length (ft.)	9
Refrigerant	R-290
DIMENSIONAL DATA	
Ext. Length Overall (in.)	67 1/8 (1704mm)
Ext. Depth Overall (in.)*	32 1/4 (820mm)
Ext. Height Overall (in.)†	36 1/2 (926mm)
# of Doors	2
# of Shelves	4
# of Pans	9
Shelf Size (L x D) (in.)	24 x 25 1/2
Net Capacity (cu. ft.)	20
Net Weight (lbs.)	334
Gross Weight (lbs.)	411

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 3-1/2" for cutting board and 1" for rear spacers.

† Height does not include 5-7/8" for caster height.

■ WARRANTY : 2 Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor

■ STANDARD FEATURES


- *Anti-corrosion coated evaporator*
- *Self-contained system*
- *4" dia. swivel casters with locks on the front set*
- *1/3 size, 6" deep condiment pans included*

■ OPTIONAL ACCESSORIES


- 2.5" caster, 1/2" diameter & 13 TPI: 30265H0100 (non-brake), 30265H0200 (w/ brake)
- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- Leveling leg, 1/2" - 13 TPI x 1.54": LFM1213566
- Half size bun pan rack: RX-TSP-2224-T
- Stainless steel single overshef: TSOS-P6-T

PLAN VIEW

(unit : inch)

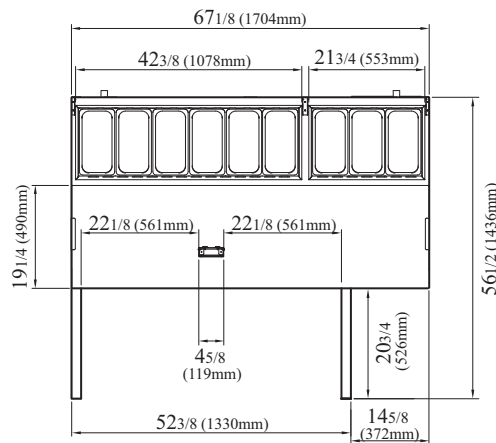

TOP VIEW

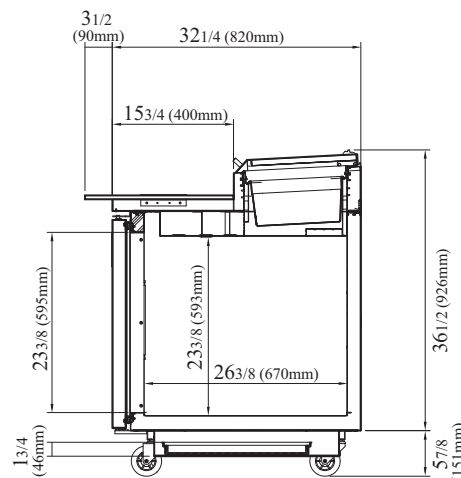

SIDE VIEW

Ver.20250501



Warranty: 800-381-7770

Warranty@RefrigerationX.com

Continued product development may necessitate specification changes without notice.