

# RefrigerationX

We Build Trust, Sell Satisfaction

4184 E. Conant St., Long Beach, CA 90808

[www.RefrigerationX.com](http://www.RefrigerationX.com)

Project:

Model #:

Item #:

Available W/H:

Qty:

Approval:

AIA #:

SIS #:

CSI Section 11400

## Solid Door Refrigerator

Reach-In Top Mount  
X-line

### FEATURES & BENEFITS

**Model : XR19-1-N6**

#### Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks
- Early warning alarm program detects issues before malfunction occurs
- Digital display allows for easy monitoring
- Programs interpret the condition of refrigeration systems by self-diagnosis
- Automatic evaporator fan motor delays

#### Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, RefrigerationX brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

#### Hot gas condensate system

Through RefrigerationX's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

#### Cabinet construction

X-line model boasts a stainless steel exterior (door) with AL exterior sides (galvanized steel top, bottom, and back). Interior has a stainless steel bottom with AL interior (walls, door liners, and top duct).

#### High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

#### LED interior lighting

#### Adjustable, heavy duty, PE (polyethylene) coated wire shelves

#### Self-contained system

#### 4" dia. swivel casters with locks on the front set

#### Door locks

#### Solid and sturdy grille design

#### Top mount compressor

#### Anti-corrosion coated evaporator standard feature

#### Refrigerator holds 33°F ~ 38°F for the best in food preservation



NATURAL  
Refrigerant

ETD  
Intertek

ETD  
Intertek

2 YEAR  
WARRANTY

5 YEAR  
WARRANTY


ENERGY STAR®  
Qualified

Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
XR19-1-N6	1	18.46	3	1/7	1.5	211	25 1/4 x 31 1/2 x 72

# Solid Door Refrigerator

Reach-In Top Mount  
X-line

## Model : XR19-1-N6

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	 NEMA 5-15P
Full Load Amperes	1.5
Compressor HP	1/7
Cord Length (ft.)	9
Refrigerant	R-600a
DIMENSIONAL DATA	
# of Doors	1
Net Capacity (cu. ft.)	18.46
Ext. Length Overall (in.)	25 1/4 (641mm)
Ext. Depth Overall (in.)*	31 1/2 (800mm)
Ext. Height Overall (in.)†	72 (1830mm)
Int. Length Overall (in.)	21 5/8 (550mm)
Int. Depth Overall (in.)	25 5/8 (650mm)
Int. Height Overall (in.)	51 3/4 (1315mm)
# of Shelves	3
Shelf Size (L x D) (in.)	20 3/4 x 23 7/8
Net Weight (lbs.)	194
Gross Weight (lbs.)	211

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 2-3/8" for rear condensate enclosure.

† Height does not include 4-3/4" for caster height.


■ **WARRANTY : 2 Year Parts and Labor Warranty**  
Additional 3 Year Warranty on Compressor

### ■ OPTIONAL ACCESSORIES


- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 6" stainless steel leg: 30221M0600
- Additional PE coated wire shelf: K1F9000103

## PLAN VIEW

(unit : inch)

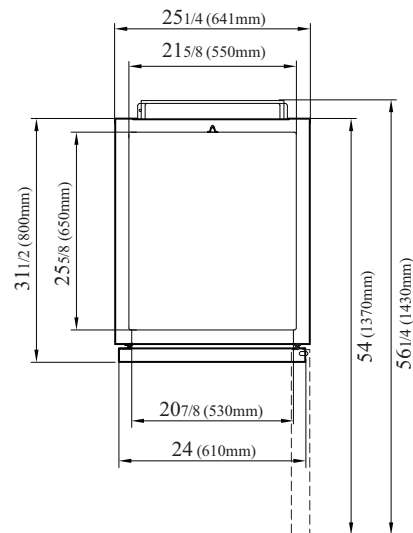

TOP VIEW

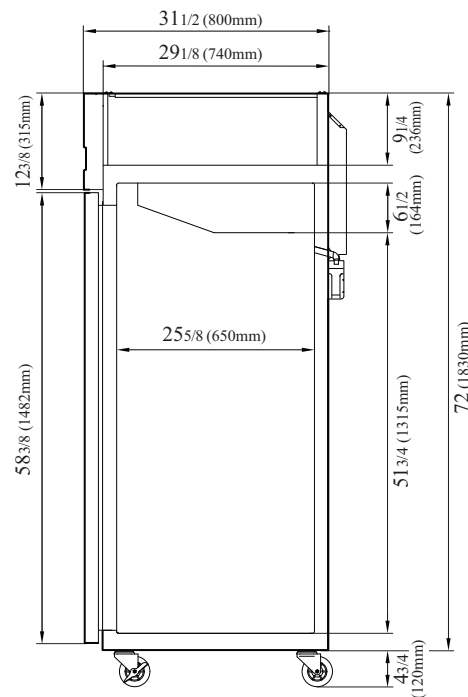

SIDE VIEW

Ver.20250610

NATURAL  
Refrigerant



ENERGY STAR®  
Qualified

Warranty: 800-381-7770

Warranty@RefrigerationX.com

Continued product development may necessitate specification changes without notice.